

## Z-Line Low Profile Boltless Shelving Installation Instructions

### RETAIN INSTRUCTIONS FOR FUTURE REFERENCE!

Congratulations on your purchase of Z-Line Low Profile Boltless Shelving. Z-Line's interlocking keyhole design not only makes installation fast and easy but eliminates the need for clips, gussets, sway braces or other hardware commonly used in conventional shelving. This allows completely free access to your stored materials from all sides of the unit.


Z-Line Low Profile Shelving is available in a variety of heights, depths and widths for virtually any application. And starter and adder units allow for joining shelving units together.

#### SHELF LOAD CAPACITIES

36" wide units	600 lbs. per shelf
42" wide units	550 lbs. per shelf
48" wide units	500 lbs. per shelf

#### GENERAL SAFETY INFORMATION

Some parts may have sharp edges. CARE must be taken when handling the pieces to avoid injury. For safety, wear a pair of work gloves when assembling or performing any maintenance on shelving.

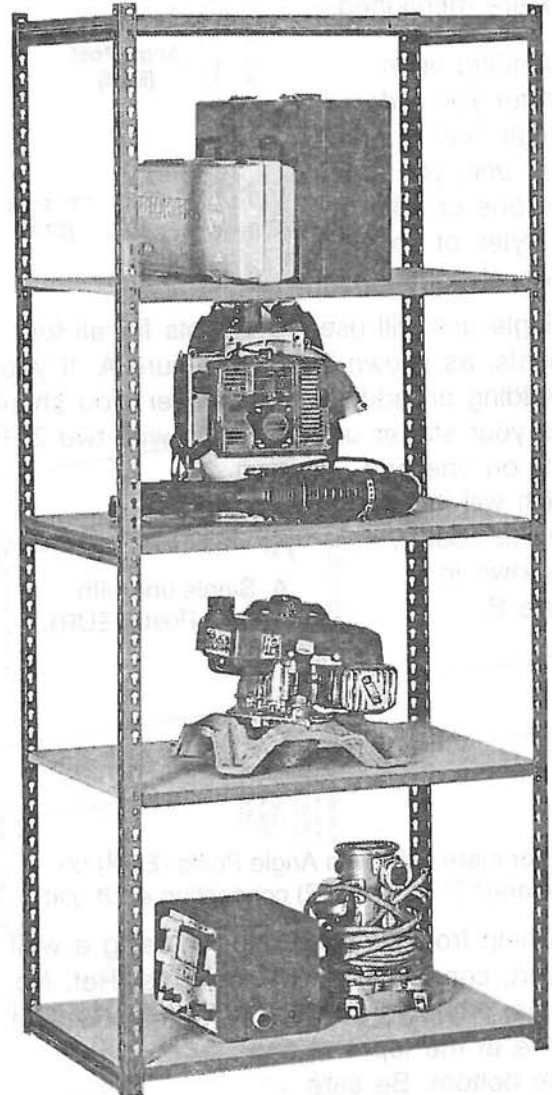


# ASSEMBLY OF BOLTLESS LOW PROFILE SHELVING

Tool Needed: A rubber mallet for seating the shelf supports into the uprights.



Two people are recommended for assembly. Approximate assembly time: 15 to 30 minutes per station.

1. The reference numbers used throughout this sheet refer to the illustration on the back cover. This is to help you to identify the various parts as they are mentioned.


2. Depending upon whether you ordered a single unit or an adder unit, you may have one or both of the styles of upright shown at right:



A single unit will use EUR posts for all four uprights, as shown below in Figure A. If you plan on adding an adder unit, however, you should build your starter unit with two ZTP posts on one end (which will join with the adder), as shown in Figure B.

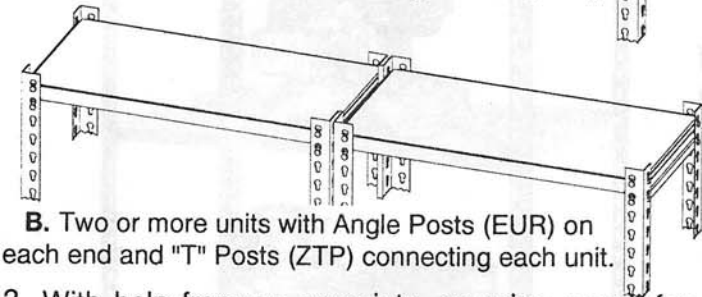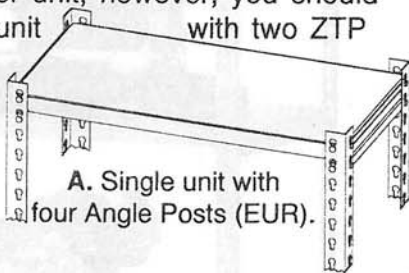


3. With help from an associate, or using a wall for support, connect two EUR uprights (Ref. No. 1a) together with two front-to-back supports (Ref. No. 2), one at the top and one at the bottom. Be sure the front-to-back supports are fully seated in the key-hole slots, as shown.

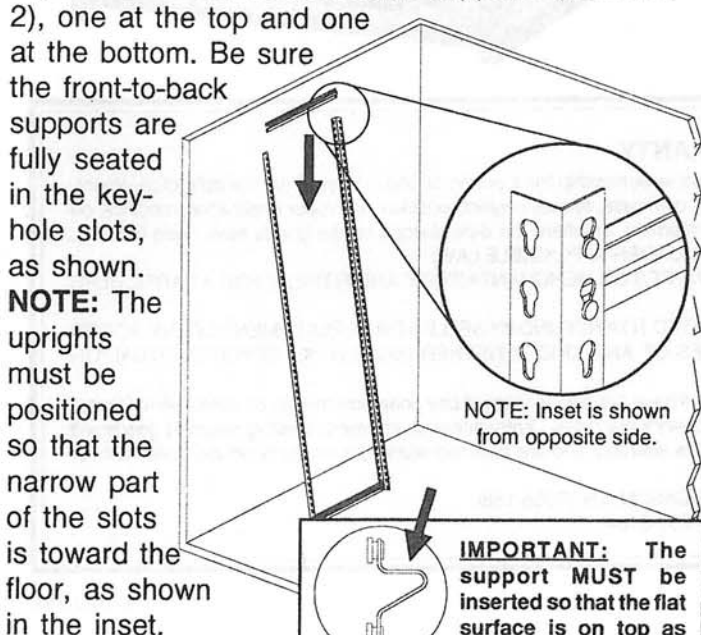


4. Place a third front-to-back end support in the middle slots of the two uprights. This forms one end of the shelving unit.

**NOTE:** There will be only three (3) front-to-back end supports per unit end, as shown. These are not shelf supports, and are not needed at every shelf level.

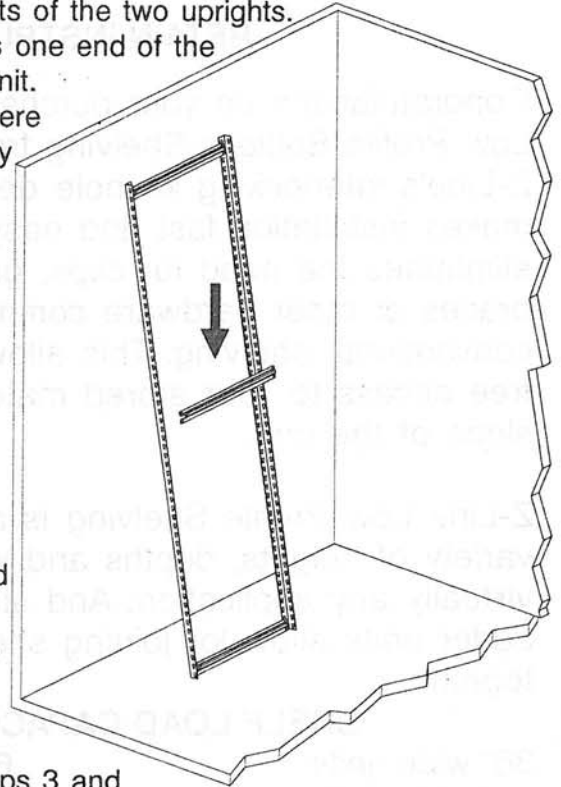


5. Repeat steps 3 and 4 to construct a second set of unit ends.


**NOTE:** If you are planning to install an adder unit, this second end should consist of ZTP Uprights (Ref. No. 1b) so that you can connect your next unit. Carefully re-read through step 2 to better understand this.

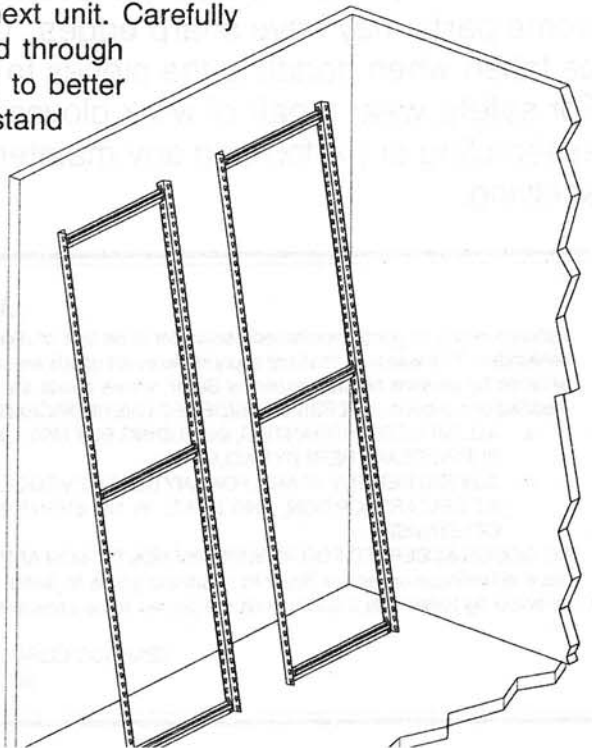

6. With the help of an associate, connect the two unit ends with left-to-right shelf supports. Again, be sure that the shelf supports are fully seated, as illustrated in step 3.

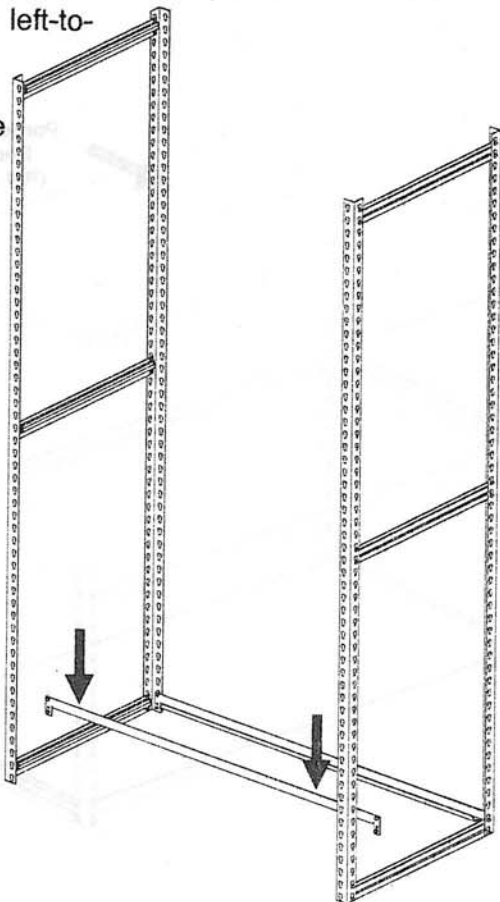


7. Attach the remaining shelf supports at the desired shelf levels, making sure that all shelf supports are completely seated in the upright slots.


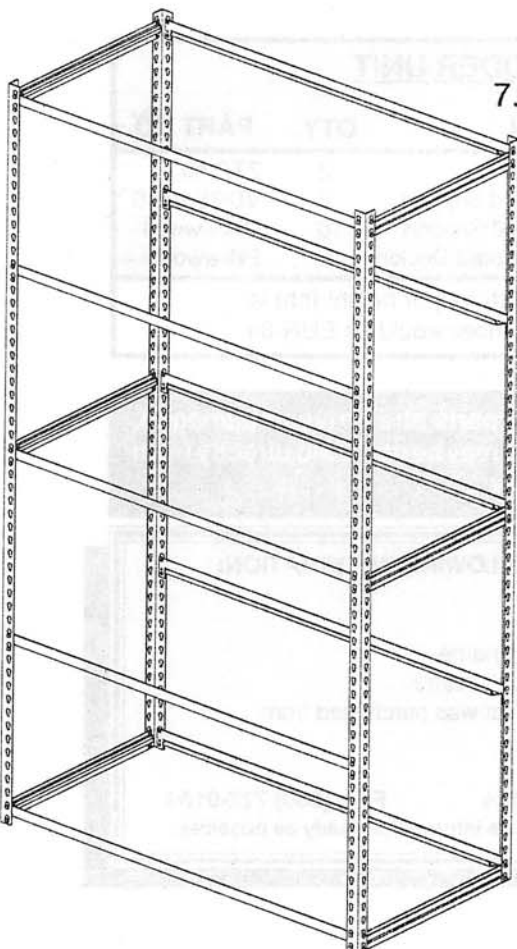


8. If particleboard decking was ordered, place the decking on each shelving level. The decking should fit flush inside the shelf supports.


If you have purchased a single unit, your shelving unit is now complete. For adder units, see step 9.

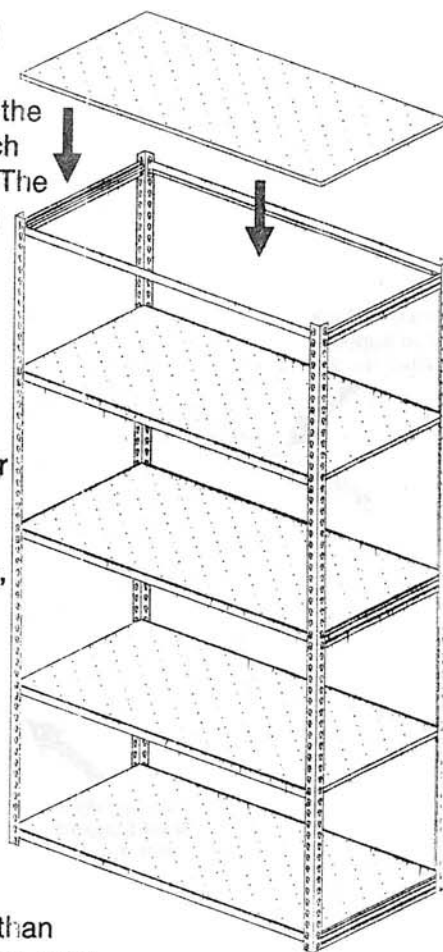

9. If joining more than one unit together, your original unit should have been assembled with ZTP uprights on one end, as described in step 5. Simply continue adding shelf supports and uprights to complete your additional units.

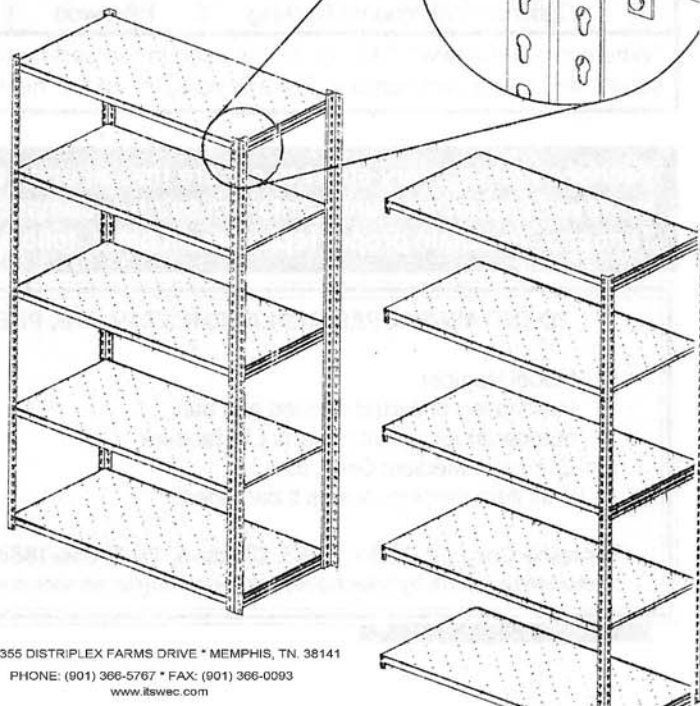

# REPLACEMENT PARTS

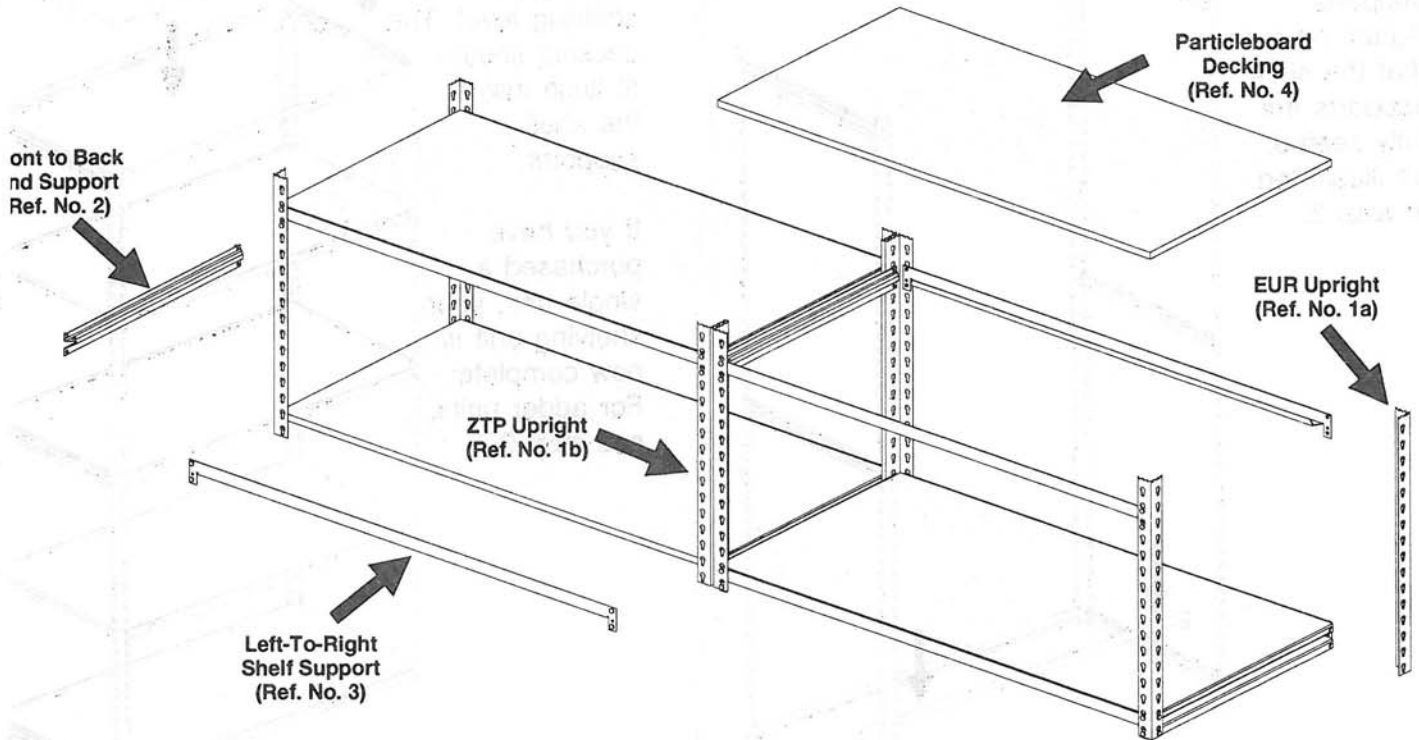

SINGLE OR STARTER UNIT				ADDER UNIT			
REF. NO.	DESCRIPTION	QTY.	PART NO.	REF. NO.	DESCRIPTION	QTY.	PART NO.
1a	Angle Post	4	EUR-hh	1b	"T" Post	2	ZTP-hh
2	Front-To-Back End Support	6	VDRS-dd16	2	Front-To-Back End Support	6	VDRS-dd16
3	Left-To-Right Shelf Support	10	DRS-ww14	3	Left-To-Right Shelf Support	10	DRS-ww14
4	Optional Particleboard Decking	5	PB-wwdd	4	Optional Particleboard Decking	5	PB-wwdd

\*Where the suffix "ww", "dd", or "hh" is used in the part number, the width (ww), depth (dd) or height (hh) is substituted in the part number. For example, for an 84" high Angle Post, the part number would be EUR-84.