

WEC

WHOLESALE EQUIPMENT COMPANY

5355 DISTRIPLEX FARMS DRIVE
MEMPHIS, TN. 38141
PHONE: 901.366.5767 FAX: 901.366.0093
<http://www.itswec.com>

Z-Line Components

Post Options

Post Options
Match posts with your needs:
Use SUR posts for your most
demanding applications. Use
EUR for light or medium weight
applications and in conjunction
with ZTP posts. Use ZTP as an
intermediate common "T" post.



SUR
Heavy Upright Post



EUR
Standard Upright Post




ZTP
Intermediate Upright
Post

Shelf Options



Particle Board Decking
Industrial grade $\frac{3}{8}$ " particle board decking provides a
sturdy work surface that is both strong and economical.

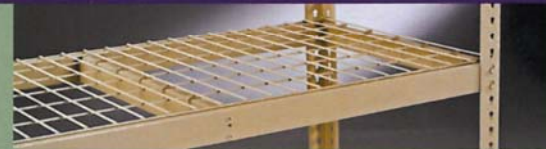

Wire Decking
Select wire decking for better visibility of items.
Meets Factory Mutual fire codes.

Support Options



Low Profile Support Options
Maximizes shelf openings in light to medium duty
support applications. Available in 14 or 11 gauge
steel. Load capacities range from 600 to 800 lbs.,
depending upon steel gauge and shelf size.



Medium Profile Support Options
Special V-beam design provides heavy-duty support
at an economical price. Available in 16 or 14 gauge
steel. Load capacities range from 600 to 1,000 lbs.,
depending upon steel gauge and shelf size.



Wide Profile Shelf Supports
Heavy-duty $\frac{2}{4}$ " high beam to laterally support
decking in longer spans. For load capacities
ranging from 1,250 lbs. to 2,500 lbs., depending
upon shelf size.



Channel Beams
Extra heavy-duty $\frac{3}{4}$ " high beam for maximum strength.
Supports spans 48" and longer. Load capacities range
from 1,600 lbs. to 2,500 lbs., depending upon
shelf size.

WEC

WHOLESALE EQUIPMENT COMPANY

5355 DISTRIPLEX FARMS DRIVE
MEMPHIS, TN. 38141
PHONE: 901.366.5767 FAX: 901.366.0093
<http://www.itswec.com>

Z-Line Accessories

Shelf Support Options



Front to Back Shelf Deck Support
For added support for decking on long spans. Used with wide profile shelf supports and Channel Beams.



Medium Profile Front to Back Shelf Supports
Added support on long spans of medium profile shelf supports. Snap-in design for easy installation.

Shelf Tie Options



Cross Aisle Ties
Cross aisle ties stabilize rows of shelving by tying them together across the aisle.



Adjustable Aisle Ties
Links units across an aisle in distances from 48" to 84"

Connectors



Tie and Anchor Plates
Connect two units back-to-back or side-to-side while maintaining spacing for rivet head clearance.



Wall Tie
Connects a unit to the wall with a 9" spacing. Provides additional stability for tall units.



Post Splice Angle
Splices two upright posts together.

Other Options



Doors
Sturdy doors keep out dust and debris while also providing a finished look.



Sides and Backs
Sturdy sides and backs keep out dust and debris while also providing a finished look.



Hang Rods
Allows shelving to be used as a retail clothes rack.



Nylon End Caps
Protect the ends of your shelf uprights with these durable nylon endcaps.

WEC

WHOLESALE EQUIPMENT COMPANY

5355 DISTRIPLEX FARMS DRIVE
MEMPHIS, TN. 38141
PHONE: 901.366.5767 FAX: 901.366.0093
<http://www.itswec.com>

Z-Line Shelving Components: Posts, Shelf & Deck Supports

Match posts with your needs: Use SUR posts for the most demanding applications. Use EUR for light or medium weight applications and in conjunction with ZTP posts. Use ZTP as an intermediate common "T" post.

Shelf and Deck Supports

Z-Line offers a variety of supports that accommodate medium to heavy duty applications. Shelf supports are available in 14 and 16 gauges. Front to back shelf deck supports help support decking on long spans and work with wide profile shelf supports and channel beams.

Please Note

Standard Colors: Light Grey,
Medium Grey, Sand

QuickShip Colors: Medium Grey,
Sand



Look for the red dot



Standard Angle Post

Cat. No.	Length	Wt.	Lbs.
EUR-36	36	1.9	
EUR-48	48	2.4	
EUR-60	60	3.0	
EUR-72	72	3.7	
EUR-84	84	4.2	
EUR-96	96	4.9	
EUR-108	108	5.6	
EUR-120	120	6	
EUR-132	132	6.8	
EUR-144	144	7.5	

Total weight capacity is not to exceed 8,000 lbs. (2,000 lbs. per post) per unit, based on 24" centers or less.



Intermediate Post

Cat. No.	Length	Wt.	Lbs.
ZTP-36	36	3.6	
ZTP-48	48	4.9	
ZTP-60	60	6.1	
ZTP-72	72	7.3	
ZTP-84	84	8.5	
ZTP-96	96	9.7	
ZTP-108	108	11	
ZTP-120	120	12.2	
ZTP-132	132	13.4	
ZTP-144	144	14.6	

Total weight capacity is not to exceed 11,000 lbs. (5,500 lbs. per post) per unit, based on 24" centers or less.



Heavy Angle Post

Cat. No.	Length	Wt.	Lbs.
SUR-36	36	2.8	
SUR-48	48	3.7	
SUR-60	60	4.6	
SUR-72	72	5.4	
SUR-84	84	6.5	
SUR-96	96	7.4	
SUR-108	108	8.3	
SUR-120	120	9.2	
SUR-132	132	10.1	
SUR-144	144	11.1	
SUR-168	168	12.9	
SUR-181.5	181.5	13.9	

Total weight capacity is not to exceed 13,000 lbs. (3,250 lbs. per post) per unit, based on 24" centers or less.



Medium-Duty Shelf Supports

Cat. No.	Load Capacity	Recommended Deck Supports	Length	Wt.
16-Gauge				
VDRS-1216	1000	-	11.5	.6
VDRS-1516	1000	-	14.5	.8
VDRS-1816	1000	-	17.5	.9
VDRS-2416	1000	-	23.5	1.3
VDRS-3016	1000	-	29.5	1.5
VDRS-3616	1000	1	35.5	1.8
VDRS-4216	900	1	41.5	2.2
VDRS-4816	850	1	47.5	2.5
14-Gauge				
VDRS-4814	1000	1	47.5	3.6
VDRS-6014	750	1	59.5	4.6
VDRS-6914	650	2	68.5	5.2
VDRS-7214	600	2	71.5	5.4



Medium-Duty Front-To-Back Deck Supports (for VDRS)

Cat. No.	W	D	H	Wt.
FBSV-12	1 3/8	12	2 1/8	.6
FBSV-15	1 3/8	15	2 1/8	.8
FBSV-18	1 3/8	18	2 1/8	.9
FBSV-24	1 3/8	24	2 1/8	1.3
FBSV-30	1 3/8	30	2 1/8	1.6
FBSV-36	1 3/8	36	2 1/8	1.9
FBSV-42	1 3/8	42	2 1/8	2.2
FBSV-48	1 3/8	48	2 1/8	2.5

Request Quote

WEC

WHOLESALE EQUIPMENT COMPANY

5355 DISTRIPLEX FARMS DRIVE
MEMPHIS, TN. 38141
PHONE: 901.366.5767 FAX: 901.366.0093
<http://www.itswec.com>

Z-Line Shelving Components: Shelf & Deck Supports

Z-Line offers a variety of supports that accommodate medium to heavy duty applications. Choose from Low Profile supports to maximize shelf openings with thin but strong shelf supports or Heavy-Duty and Extra Heavy-Duty Channel shelf supports for greater load capacity.


Please Note

Standard Colors: Light Grey,
Medium Grey, Sand

QuickShip Colors: Medium Grey,
Sand



Look for the red dot!



Heavy-Duty Shelf Supports

Cat. No.	Load Capacity	Recommended # of SDS-dd Supports	Length	Wt.
LRA-12	2250	-	11.5	.7
LRA-15	2250	-	14.5	.9
LRA-18	2250	-	17.5	1.4
LRA-24	2250	-	23.5	1.7
LRA-30	2250	-	29.5	2.3
LRA-36	2250	-	35.5	2.8
LRA-42	2250	1	41.5	3.3
LRA-48	2250	1	47.5	3.7
LRA-60	2000	1	59.5	4.5
LRA-69	1800	1	68.5	5.4
LRA-72	1750	2	71.5	5.6
LRA-84	1500	3	83.5	6.6
LRA-96	1250	3	95.5	7.5

Load capacities are based on the recommended number of SDS-xx front-to-back deck supports.

Extra Heavy-Duty Channel Shelf Supports

Cat. No.	Load Capacity	Recommended # of SDS-dd Supports	Length	Wt.
LRC-48	2500	1	47.5	5.2
LRC-60	2250	1	59.5	6.2
LRC-72	2000	2	71.5	7.4
LRC-84	1750	3	83.5	8.7
LRC-96	1600	3	95.5	9.9

Load capacities are based on the recommended number of SDS-xx front-to-back deck supports.



Low Profile Shelf Supports

Cat. No.	Load Capacity	Length	D	H	Wt.
14-Gauge					
DRS-1214	600	11.5	27/32	1 1/8	.5
DRS-1514	600	14.5	27/32	1 1/8	.7
DRS-1814	600	17.5	27/32	1 1/8	.9
DRS-2414	600	23.5	27/32	1 1/8	1.1
DRS-3014	600	29.5	27/32	1 1/8	1.4
DRS-3614	600	35.5	27/32	1 1/8	1.7
DRS-4214	550	41.5	27/32	1 1/8	2.0
DRS-4814	500	47.5	27/32	1 1/8	2.3
11-Gauge					
DRS-3611	850	35.5	27/32	1 1/8	2.8
DRS-4211	800	41.5	27/32	1 1/8	3.2
DRS-4811	750	47.5	27/32	1 1/8	3.7



Front-To-Back Deck Supports (Use with LRA & LRC Supports)

Cat. No.	W	D	H	Wt.
SDS-12	1 3/8	12	2 3/8	1.0
SDS-15	1 3/8	15	2 3/8	1.2
SDS-18	1 3/8	18	2 3/8	1.4
SDS-24	1 3/8	24	2 3/8	1.9
SDS-30	1 3/8	30	2 3/8	2.4
SDS-36	1 3/8	36	2 3/8	2.8
SDS-42	1 3/8	42	2 3/8	3.3
SDS-48	1 3/8	48	2 3/8	3.8

Request Quote

WEC

WHOLESALE EQUIPMENT COMPANY

5355 DISTRIPLEX FARMS DRIVE
MEMPHIS, TN. 38141
PHONE: 901.366.5767 FAX: 901.366.0093
<http://www.itswec.com>

Z-Line Shelving Components: Particle Board, Wire Decking, Steel Shelves & Box Rails

Choose from three great options for shelf decking: industrial grade 5/8" particle board decking, wire decking or steel shelves. Particle board decking provides a sturdy work surface that is both strong and affordable. Wire decking provides better visibility of items and meets Factory Mutual fire codes.

Please Note


Standard Colors: Light Grey,
Medium Grey, Sand

QuickShip Color: Medium Grey



Particle Board Decking

Cat. No.	W	D	H	Wt.
PB-3612	36	12	5/8	7.4
PB-3615	36	15	5/8	9.3
PB-3618	36	18	5/8	11.1
PB-3624	36	24	5/8	14.9
PB-3630	36	30	5/8	18.6
PB-3636	36	36	5/8	22
PB-4212	42	12	5/8	8.7
PB-4215	42	15	5/8	10.8
PB-4218	42	18	5/8	13
PB-4224	42	24	5/8	17.3
PB-4230	42	30	5/8	22
PB-4236	42	36	5/8	26
PB-4812	48	12	5/8	9.9
PB-4815	48	15	5/8	12.4
PB-4818	48	18	5/8	14.9
PB-4824	48	24	5/8	19.8
PB-4830	48	30	5/8	25
PB-4836	48	36	5/8	30
PB-4842	48	42	5/8	35
PB-4848	48	48	5/8	40
PB-6024	60	24	5/8	25
PB-6030	60	30	5/8	31
PB-6036	60	36	5/8	37
PB-6048	60	48	5/8	50
PB-6915	69	15	5/8	17.8
PB-6930	69	30	5/8	36
PB-7224	72	24	5/8	30
PB-7230	72	30	5/8	37
PB-7236	72	36	5/8	45
PB-7248	72	48	5/8	59
PB-9624	96	24	5/8	40
PB-9630	96	30	5/8	50
PB-9636	96	36	5/8	59
PB-9648	96	48	5/8	79

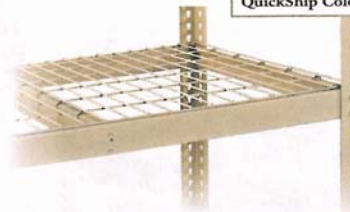

Wire Decking

Cat. No.	W	D	H	Wt.
ZWD-3612	36	12	5/16	4
ZWD-3618	36	18	5/16	6
ZWD-3624	36	24	5/16	8
ZWD-3636	36	36	5/16	12
ZWD-4812	48	12	5/16	5.4
ZWD-4818	48	18	5/16	8
ZWD-4824	48	24	5/16	10.7
ZWD-4836	48	36	5/16	16



Steel Shelves

Cat. No.	W	D	H	Wt.
ZMS-3612	36	12	1 1/16	6.7
ZMS-3618	36	18	1 1/16	8.8
ZMS-3624	36	24	1 1/16	10.9
ZMS-3636	36	36	1 1/16	17.9
ZMS-4212	42	12	1 1/16	7.7
ZMS-4218	42	18	1 1/16	10.1
ZMS-4224	42	24	1 1/16	12.5
ZMS-4236	42	36	1 1/16	21
ZMS-4812	48	12	1 1/16	8.7
ZMS-4818	48	18	1 1/16	11.4
ZMS-4824	48	24	1 1/16	14.1
ZMS-4836	48	36	1 1/16	23
Replacement Shelf Clips				
ZSC-1	-	-	-	.1



Box Rails

Cat. No.	W	D	H	Wt.
ZBR-15	1 1/2	15	2 3/8	.8
ZBR-30	1 1/2	30	2 3/8	1.6



Request Quote

WEC

WHOLESALE EQUIPMENT COMPANY

5355 DISTRIPLEX FARMS DRIVE
MEMPHIS, TN. 38141
PHONE: 901.366.5767 FAX: 901.366.0093
<http://www.itswec.com>

Z-Line Shelving Components: Aisle/Wall Ties, Hang Rods & Accessories

Z-Line provides versatility with a variety of accessories to design shelving configurations to fit your every need. Aisle and Wall ties provide stability where you need it the most.

Please Note

Standard Colors: Light Grey, Medium Grey, Sand

QuickShip Colors: Medium Grey, Sand



Cross Aisle Ties

Cat. No.	W	D	H	Wt.
CAT-18	1 ³ / ₈	18	2 ³ / ₈	1.4
CAT-24	1 ³ / ₈	24	2 ³ / ₈	1.9
CAT-30	1 ³ / ₈	30	2 ³ / ₈	2.4
CAT-36	1 ³ / ₈	36	2 ³ / ₈	2.8
CAT-42	1 ³ / ₈	42	2 ³ / ₈	3.3
CAT-48	1 ³ / ₈	48	2 ³ / ₈	3.8



Adjustable Aisle Tie

Cat. No.	W	D	H	Wt.
KCAT-1	3	*	1	5.3

* Depth adjusts from 48" to 84".



Wall Tie

Cat. No.	W	D	H	Wt.
WT-9	9 ¹ / ₄	1 ³ / ₈	2 ³ / ₈	.7



Soft Nylon Protective Caps

Cat. No.	W	D	H	Wt.
EURPC	1 ¹ / ₂	1 ¹ / ₂	7 ⁷ / ₁₆	.1
ZTPPC	3 ⁷ / ₁₆	2	7 ⁷ / ₁₆	.1
SURPC	2 ¹ / ₁₆	2 ¹ / ₁₆	7 ⁷ / ₁₆	.1

Nylon Protective Caps available in black only.

Hang Rods For DRS Supports

Cat. No.	W	D	H	Wt.
ZHR-36	⁵⁶ / ₆₄	36 ³ / ₁₆	1 ³ / ₆₄	2.3
ZHR-48	⁵⁶ / ₆₄	38 ³ / ₁₆	1 ³ / ₆₄	3.1



Tie Plate

Cat. No.	W	D	H	Wt.
TP-1	3	-	2 ³ / ₄	.2



Clothing Hang Rods For LRA Supports

Cat. No.	W	D	H	Wt.
PHR-36	1 ⁵ / ₁₆	36 ¹ / ₁₄	1 ¹ / ₁₆	2.9
PHR-48	1 ⁵ / ₁₆	48 ¹ / ₁₄	1 ¹ / ₁₆	3.8



Anchor Plate

Cat. No.	W	D	H	Wt.
ZFA-1	1 ³ / ₈	15	2 ³ / ₈	.2



Post Splice Angle

Cat. No.	W	D	H	Wt.
PSA-2	1 ⁵ / ₁₆	1 ⁵ / ₁₆	6 ¹ / ₂	.5

Request Quote